



Oval flanged bearing supports


Serie UCFL/CS

NEW

New product line with support body in PA white colour.



Back gasket for shouldered shaft

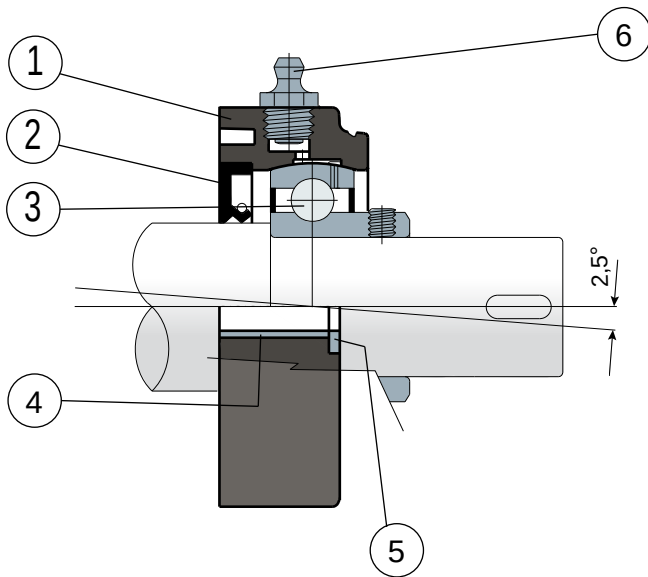

- 1) Support body made out of polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser for relubrication made out of nickel-plated brass.


Support dimensions respect ISO 3228 set of rules.
Maximum shaft alignment error 2,5°
For further information please contact our technical office or sales department.



Oval flanged bearing supports

Technical data

Serie UCFL/CS

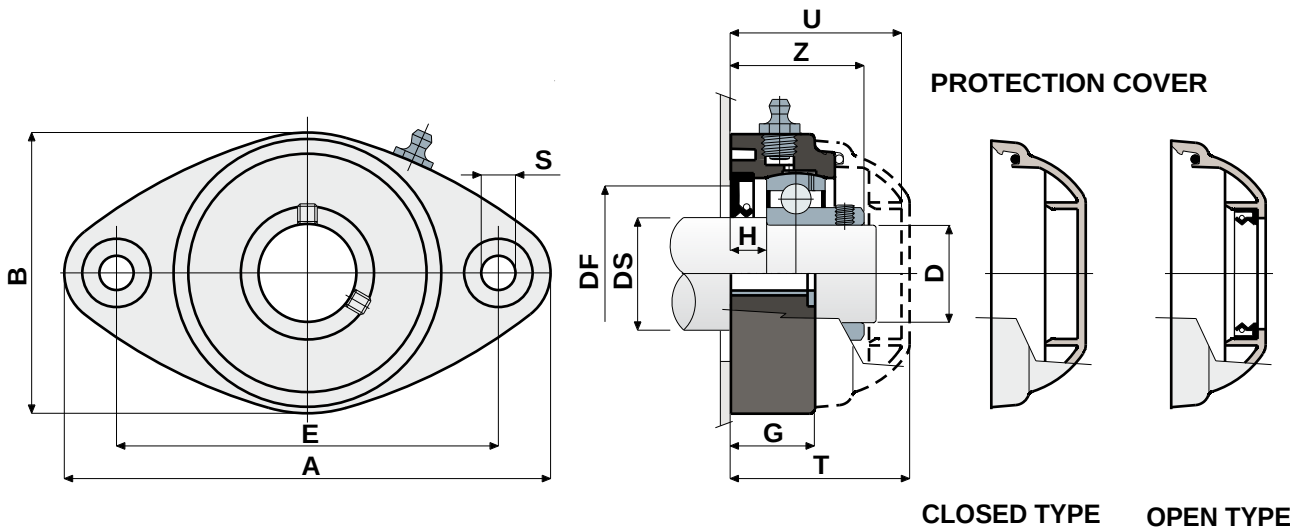

CHROME STEEL BEARING																					
DS	D	SERIE	Support CODES			DIMENSIONS (mm)											Bearing load (N)		Bearing support load (N)	COVER CODES	
			Black colour	White colour	E	A	B	S	G	H	Z	U	T	DF		C	C0	Closed type		Open type	
														Max	Min						
25	20	UCFL 204 CS	80266	85264	90	118	64	10,5	19	8,5	33,5	44	46,5	45	40	12800	6600	8500	80254	80255	
30	25	UCFL 205 CS	80184	85265	99	131	72	10,5	22	10	36	47	49	50	45	14000	7800	10000	80075	80076	
35	30	UCFL 206 CS	80185	85266	117	149	86	10,5	26	11,5	41	54	56	60	50	19500	11300	13000	80011	80053	
40	35	UCFL 207 CS	80186	85267	130	163	94	10,5	26	10,5	45	57	59	70	55	25500	15300	14000	80077	80078	
45	40	UCFL 208 CS	85233	-	144	172	100	10,5	27	8,5	48,5	65,5	71	78	65	30700	19000	15000	80256	80257	
STAINLESS STEEL BEARING AISI 440																					
DS	D	SERIE	Support CODES		DIMENSIONS (mm)											Bearing load (N)		Bearing support load (N)	COVER CODES		
			Black colour	White colour	E	A	B	S	G	H	Z	U	T	DF		C	C0		Closed type	Open type	
														Max	Min						
25	20	UCFL 204 CS	84148	85268	90	118	64	10,5	19	8,5	33,5	44	46,5	45	40	8500	6550	8500	80254	80255	
30	25	UCFL 205 CS	83907	85269	99	131	72	10,5	22	10	36	47	49	50	45	9150	7800	10000	80075	80076	
35	30	UCFL 206 CS	80523	85270	117	149	86	10,5	26	11,5	41	54	56	60	50	12500	11200	13000	80011	80053	
40	35	UCFL 207 CS	84150	85271	130	163	94	10,5	26	10,5	45	57	59	70	55	16600	15300	14000	80077	80078	
45	40	UCFL 208 CS	85234	-	144	172	100	10,5	27	8,5	48,5	65,5	71	78	65	20000	19000	15000	80256	80257	

MATERIALS: Support made out of PA + glass fiber black colour; chrome steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.
FEATURES: Back gasket for shouldered shafts. Use of shouldered shafts allows a higher capability of axial load. Maximum shaft alignment error 2.5°.
BOX QUANTITY: 8 pieces.
ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive (external body in white color); protection cover in different colors and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.