




Oval flanged bearing supports

Serie UCFL/CX

NEW

New product line with support body in PA white colour.

Without protection cover

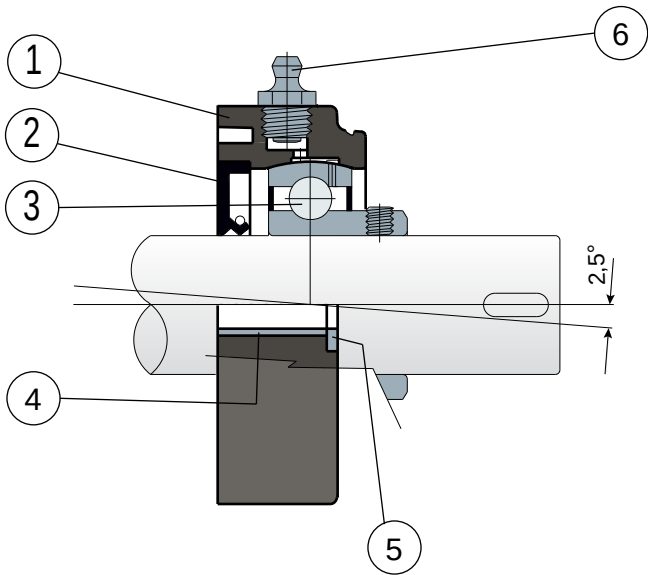

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser for relubrication made out of nickel-plated brass.

NOTE: The only difference from UCFL/C series is lack of protection cover, which can be ordered separately as an accessory.


Support dimensions respect ISO 3228 set of rules.
Maximum shaft alignment error 2,5°
For further information please contact our technical office or sales department.

Oval flanged bearing supports

Technical data



Serie UCFL/CX

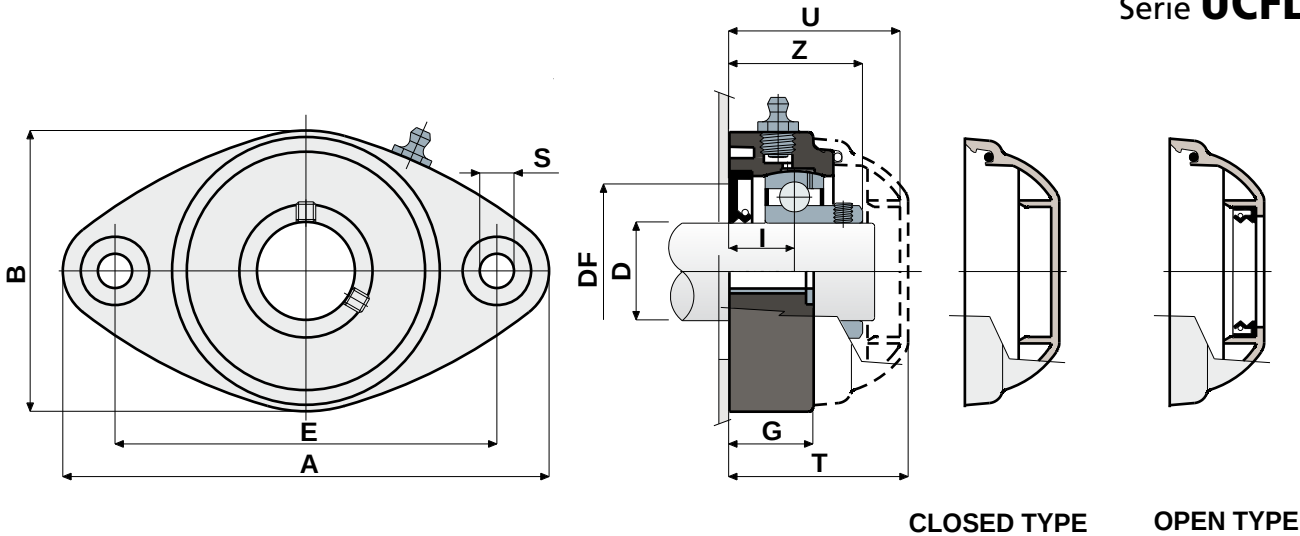

CHROME STEEL BEARING																			
D	SERIE	Support CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load	COVER CODES		
		Black colour	White colour	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type
													Max	Min					
20	UCFL 204 CX	80264	84660	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	8500	80254	80255
25	UCFL 205 CX	80181	84661	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000	80075	80076
30	UCFL 206 CX	80182	84662	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000	80011	80053
35	UCFL 207 CX	80183	84663	130	163	94	10,5	26	20	45	57	59	70	55	25500	15300	14000	80077	80078
40	UCFL 208 CX	85225	85227	144	172	100	10,5	27	19,5	48,5	65,5	71	78	65	30700	19000	15000	80256	80257

STAINLESS STEEL BEARING AISI 440																			
D	SERIE	Support CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load	COVER CODES		
		Black colour	White colour	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type
													Max	Min					
20	UCFL 204 CX	81053	84664	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	8300	6550	8500	80254	80255
25	UCFL 205 CX	81054	84665	99	131	72	10,5	22	17	36	47	49	50	45	9150	7800	10000	80075	80076
30	UCFL 206 CX	81055	84666	117	149	86	10,5	26	20	41	54	56	60	50	12500	11200	13000	80011	80053
35	UCFL 207 CX	81056	84667	130	163	94	10,5	26	20	45	57	59	70	55	16600	15300	14000	80077	80078
40	UCFL 208 CX	85226	85228	144	172	100	10,5	27	19,5	48,5	65,5	71	78	65	20000	19000	15000	80256	80257

VERSIONS WITH MEASURES IN INCHES

D		SERIE	Support CODES		CHROME STEEL BEARING										Bearing load (N)		Bearing support load	COVER CODES		
(inches)	(mm)		Black colour	White colour	DIMENSIONS (mm)										C	C0		Closed type	Open type	
					E	A	B	S	G	I	Z	U	T	DF						
														Max	Min			(N)		
1"	25,4	UCFL 205 CX	84510	84899	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000	80075	85202
1"1/4	31,75	UCFL 206 CX	84511	84900	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000	80011	85203

MATERIALS: Support made out of black or white colour PA + glass fiber; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.
FEATURES: The difference from UCFL/C series is lack of protection cover which can be ordered separately as an accessory. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.
BOX QUANTITY: 8 pieces.
ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colors and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.